

EX45900 Series

株式会社サイバネテック

Hardened Unmanaged 5-port 10/100/1000BASE (4 x PoE) + 1-port 1000BASE-X Gigabit Ethernet Switch



Overview

EtherWAN's EX45900 Series provides a hardened 5-port switching platform supporting IEEE802.3at Power over Ethernet, high performance switching with robust features required for mission-critical and harsh environments where sustained connectivity is crucial.

The EX45900 Series is equipped with 4 10/100/1000BASE-TX PoE ports, in combination with one Gigabit Fiber option. The EX45900 is feature rich with 10K Jumbo Frame support, full wire speed Gigabit throughput, QoS support and eco-friendly IEEE802.3az EEE (Energy Efficient Ethernet) compliant, making the EX45900 Series a powerful yet energy efficient network switch.

The IEEE802.3at PoE ports provide up to 30W/port with a total power budget of 120W, making the switch truly versatile for connecting with PoE Powered Devices (PD) with different bandwidth and power consumption requirements such as; outdoor PTZ dome cameras, wireless access points, and way-side communication devices.

EtherWAN – "When Connectivity is Crucial."

Spotlight

• Power over Ethernet

- Port 1-4 are PoE ports that provide power up to 30W

• Energy Efficient Ethernet (EEE)

- Supports IEEE802.3az standard

• Fiber Connectivity

- Up to one 1000BASE-SX ports with SC, ST and SFP options

Technology

Standards

- IEEE802.3 10BASE-T
- IEEE802.3u 100BASE-TX/100BASE-FX
- IEEE802.3ab 1000BASE-T
- IEEE802.3z 1000BASE-SX/1000BASE-LX
- IEEE802.1x Full duplex flow control
- IEEE802.1az Energy Efficient Ethernet
- IEEE802.1p Quality of Service(QoS)
- IEEE802.3af/at Power over Ethernet (PoE)

Forward and Filtering Rate

- 14,880pps for 10Mbps
- 148,810pps for 100Mbps
- 1,488,100pps for 1000Mbps

Packet Buffer Memory

- 1M bits

Processing Type

- Store-and-Forward
- Auto Negotiation
- Half-duplex back-pressure and IEEE802.3x full-duplex flow control
- Auto MDI/MDIX

Jumbo Frame

- 10K bytes

Address Table Size

- 8192 MAC addresses

Power

Input Voltage

- 24/48VDC

Power Consumption

- Device: Max. 7W (without PoE)
- PoE Power budget: 120W

Protection

- Reverse polarity protection
- Overload current protection

Mechanical

Casing

- Metal case
- IP30

Dimensions

- 30mm (W) x 100mm (D) x 149mm (H)
(1.18" (W) x 4" (D) x 5.96" (H))

Weight

- 0.34Kg (0.75lb.)

Installation

- DIN-Rail

Interface

Ethernet Ports

- 10/100/1000BASE-T: 5 ports
- 1000BASE-X: 0 or 1 ports

LED Indicators

- Per Unit: Power 1 (Green)
Power 2 (Green)
Alarm (Red)
- Per Port: 10/100M (Green)
1000M (Amber)
- Per PoE Port: PoE status (Amber)

Alarm Contact

- One relay output with current 1A@250VAC
- Supports normal open

Environment

Operating Temperature

- -40°C to 75°C (-40°F to 167°F);
Tested @ -40°C to 85°C (-40°F to 185°F)

Storage Temperature

- -40°C to 85°C (-40°F to 185°F)

Ambient Relative Humidity

- 5% to 95% (non-condensing)

Regulatory Approvals

ISO

- Manufactured in an ISO9001 facility

Safety

UL60950

EMI

FCC Part 15B, Class A

VCCI Class A

EN61000-6-4

EMS

EN61000-6-2

- EN61000-4-2 (ESD Standards)
- EN61000-4-3 (Radiated RFI Standards)
- EN61000-4-4 (Burst Standards)
- EN61000-4-5 (Surge Standards)
- EN61000-4-6 (Induced RFI Standards)
- EN61000-4-8 (Magnetic Field Standards)


Environmental Test Compliances

IEC60068-2-6 Fc (Vibration)

IEC60068-2-27 Ea (Shock)

FED STD 101C Method 5007.1 (Free fall w/ package)

Dimensions

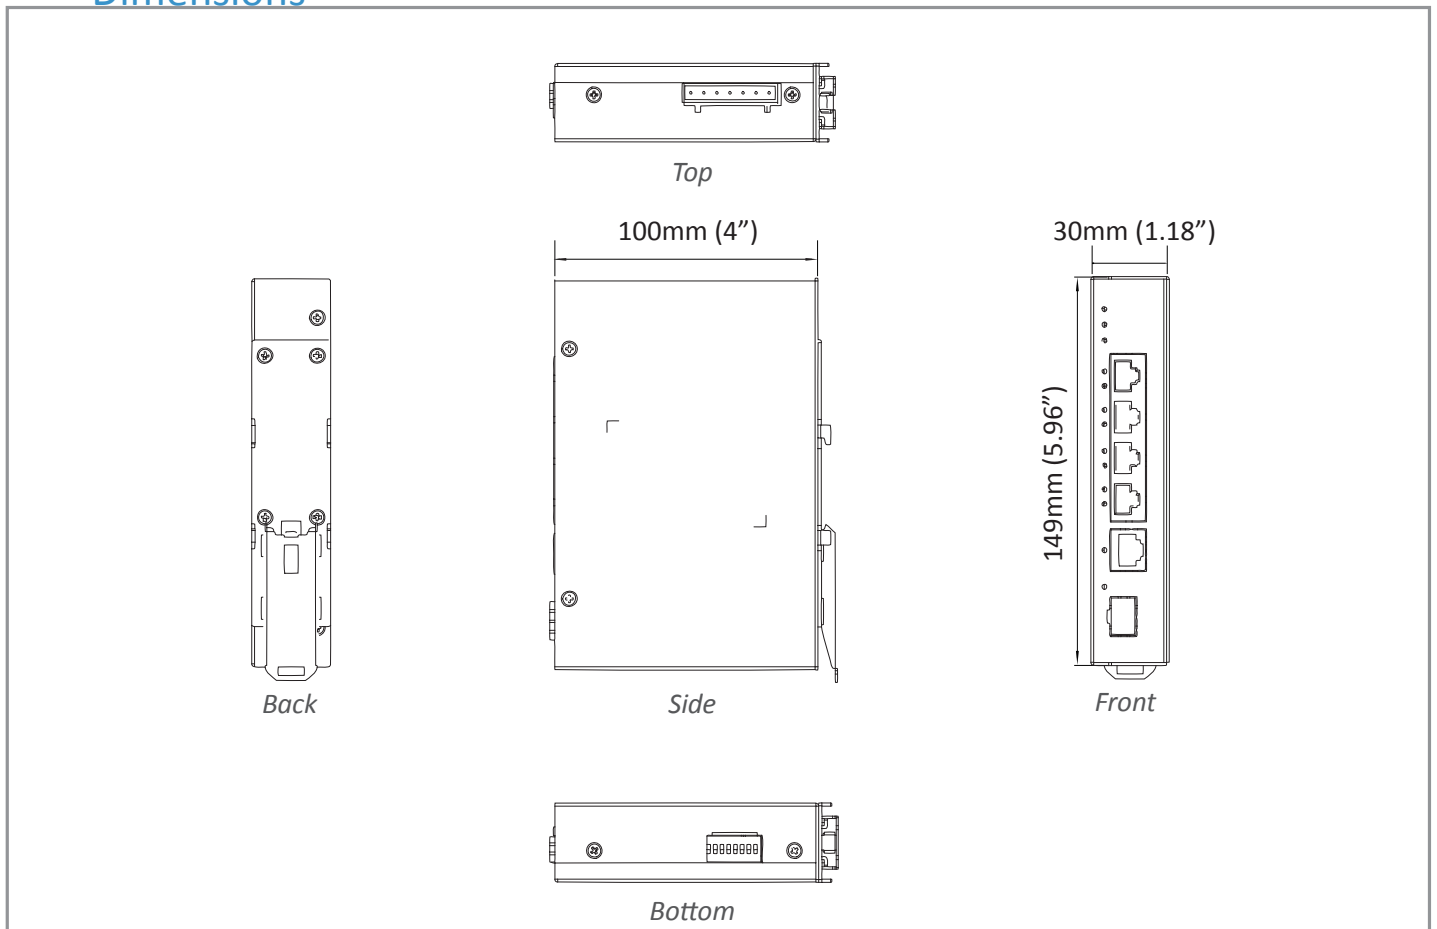

Model

| | |
|------------------|---|
| EX45905 | Hardened Unmanaged 5-port 10/100/1000BASE-T (4 x PoE) Gigabit Ethernet Switch |
| EX45915-X | Hardened Unmanaged 5-port 10/100/1000BASE-T (4 x PoE) + 1-port 1000BASE-X Gigabit Ethernet Switch |

* DIN-Rail mounting kit included

Optical Port Options (X)

| | |
|----------|--|
| 3 | 1000BASE-SX(SC)-550m |
| 5 | 1000BASE-SX(ST)-550m |
| A | 1000BASE-LX(SC)-10km |
| R | 1000BASE-BX(SC) WDM-TX:1310nm/RX:1550nm-20Km |
| S | 1000BASE-BX(SC) WDM-TX:1550nm/RX:1310nm-20Km |
| V | 1000BASE SFP |

Optional Accessories

| | |
|-------------------|---|
| SDR-240-48 | 240W/5A DIN-Rail 48VDC Industrial Power Supply (for terminal block) |
|-------------------|---|